


HYDRAULIC TORQUE TOOL



TORQUE RANGE

271 - 81338 NM

200 - 59995 FT. LBS.

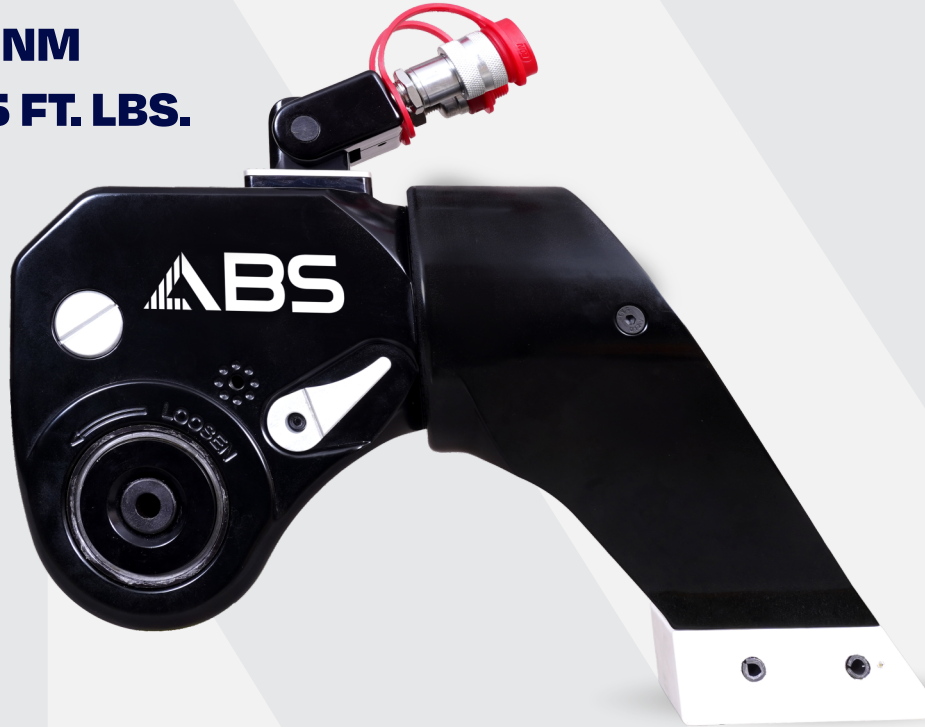

CNX SERIES

ABS CNX is built to exceed the expectations of professionals seeking unmatched speed, durability, reliability, and user-friendliness in their bolting tasks. Constructed with high-strength aluminium. The ABS CNX boasts exceptional strength and resilience. We prioritise operator comfort and ease of use with an ergonomic design that minimises fatigue and strain, while intuitive controls ensure smooth operation and error-free tightening.

The ABS CNX series offers a versatile range of torque capacities and square drive sizes, effortlessly adapting to your specific needs.

High Strength Aerospace Aluminium Material

Ensures exceptional durability and lightweight handling.

One-Way Ratcheting Mechanism

Provides efficient fastening and accuracy.

Ratchet Freeing Mechanism

Allows for smooth and precise bolt loosening.

Multi-Axis 360°-180° Swivel

Offers unmatched versatility and access in confined spaces.




ADVANCED BOLTING SOLUTIONS - SAUDI ARABIA

C/o Diversified Lines Petroleum Services Co.
Abu Al Hasan Al Zahrawy Street, Khalidiya Shumaliya,
Dammam - 32231, Saudi Arabia

Phone: (+966) 509775727
Email: mrashid@absgroup-arabia.com

www.absgroup-arabia.com



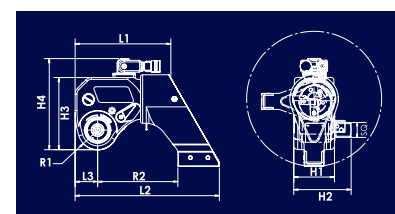

TECHNICAL SPECIFICATIONS

MODEL	L1 (inch/ mm)	L2 (inch/ mm)	L3 (inch/ mm)	H1 (inch/ mm)	H2 (inch/ mm)	H3 (inch/ mm)	H4 (inch/ mm)	R1 (inch/ mm)	R2 (inch/ mm)	DRIVE SIZE	WEIGHT (lbs/ kg)	TORQUE (ft.lbs./Nm)	
												MIN.	MAX.
CNX-02	4.9 124	7.3 186.5	1.1 28.8	2.0 51.6	2.9 72.6	3.7 93.3	4.9 124.4	1.0 25	4.1 104.3	3/4"	4.41 2	200 271	1339 1816
CNX-04	6.4 161.9	9.7 245.5	1.5 39.1	2.7 68.8	3.7 94.4	4.8 121.2	6.4 162.1	1.3 33.3	5.3 135.2	1"	10.36 4.7	479 650	3228 4377
CNX-07	7.7 195.8	11.7 296.1	1.9 48.5	3.3 82.6	5.0 126.9	5.7 143.7	7.3 185.1	1.6 39.9	6.4 161.6	1 1/2"	18.08 8.2	834 1131	5587 7575
CNX-11	7.7 195.6	12.6 319.3	2.2 55.2	3.6" 90.7	5.1 129.3	6.5 165.1	8.5 215.9	1.7 44.7	6.9 176.8	1 1/2"	24.91 11.3	1200 1627	8000 10846
CNX-15	9.6 243	14.4 366.2	2.3 57.2	4.1 103.3	5.7 145.7	7.2 183.2	9.1 231.4	2.0 49.8	8.0 203.5	1 1/2"	33.07 15	1754 2378	11513 15610
CNX-20	10.54 267.8	15.5 392.9	2.5 63.3	4.4 113	7.1 180.6	8.1 206	10.2 258.7	2.2 55.5	8.8 223.8	2 1/2"	44.53 20.2	2012 2728	14082 19093
CNX-30	11.4 289.8	17.3 438.7	2.7 68.8	4.7 120.1	7.1 180.3	8.8 223	10.2 260.1	2.4 59.9	9.6 243.3	2 1/2"	43.43 19.7	2958 4011	19748 26775
CNX-35	11.8 299.7	18.5 470.4	3.1 78.4	5.2 133.3	7.5 190	9.6 243.8	11.5 292.1	2.6 66.0	10.2 260.3	2 1/2"	68.56 31.1	3883 5265	25890 35102
CNX-50	14.0 356.3	21.2 539.2	3.3 84.6	5.8 147.8	8.3 211.3	10.8 274.1	12.4 313.9	2.9 73.7	11.7 298.2	2 1/2"	77.60 35.2	5397 7317	37078 50271
CNX-72	15.5 393.7	23 584	3.7 94	6.6 166.9	9.4 237.7	11.0 279.4	12.8 325.1	3.3 82.6	12.8 325.6	2 1/2"	124.34 56.4	7875 10677	59995 81338

*Minimum and maximum torque output data may vary.

Note: Product image shown is for illustration purposes only; actual product may vary upon delivery.

ADVANCED BOLTING SOLUTIONS - SAUDI ARABIA

C/o Diversified Lines Petroleum Services Co.

Abu Al Hasan Al Zahrawy Street, Khalidiya Shumaliya,
Dammam - 32231, Saudi Arabia

Phone: (+966) 509775727

Email: mrashid@absgroup-arabia.com

www.absgroup-arabia.com

