


**HF-FS-25EMK**



**HF-FS-15EK**

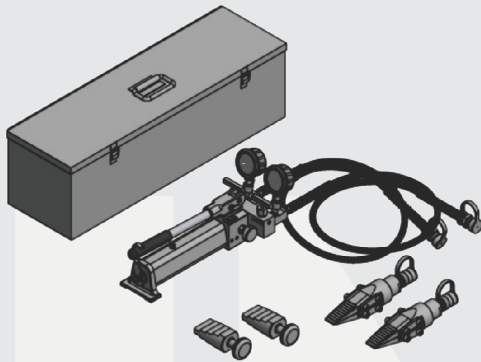

ABS Flange spreaders utilize a wedge mechanism inserted between the flanges. As the wedge is forced open, it applies controlled pressure to the flanges, separating them without damaging the components.

This allows for:

- Safe and controlled disassembly of flange connections, minimizing the risk of injury or equipment damage.
- Faster and more efficient separation compared to manual methods.
- Access to components behind the flanges for maintenance or inspection

MODEL	CAPACITY (TON)*	SPREAD (mm)		STROKE (mm)	WEIGHT (Kg)
		MIN.	MAX.		
HF-FS-15EK	15	5	15	25	3.3
HF-FS-15EMK	15 X 2	5	15	25	3.3
HF-FS-25EK	25	7	23	65	7.8
HF-FS-25EMK	25 X 2	7	23	65	7.8

## ADVANCED BOLTING SOLUTIONS - SAUDI ARABIA

C/o Diversified Lines Petroleum Services Co.  
Abu Al Hasan Al Zahrawy Street, Khalidiya Shumaliya,  
Dammam - 32231, Saudi Arabia

**Phone:** (+966) 509775727  
**Email:** mrashid@absgroup-arabia.com

[www.absgroup-arabia.com](http://www.absgroup-arabia.com)

